



MBT-SEETEL
ENERGY

CXS-5MWB

Efficient, Safe, and Stable Energy Solutions

The CXS-5MWB Battery Energy Storage System is a cutting-edge solution in energy storage technology, designed for high performance, safety, and stable power delivery—making it suitable for a wide range of energy applications.



Ultra Capacity

- 5015.9 kWh capacity with four high-efficiency battery modules per rack.
- Operates at 1331.2V, with a voltage range of 1040V to 1497.6V for stable power delivery.
- Maximum charge/discharge power of 2507.5 kW ensures reliable energy during critical times.



Exceptional Adaptability

- Operating temperature range: 15–45°C, ensuring stable performance in extreme conditions.
- Humidity tolerance: 5%–95%, adaptable to various climate environments.
- Liquid cooling system: Maintains optimal temperature, extends battery life, and improves efficiency.



Top-Tier Safety

- IP55 rating provides strong dust and water resistance for long-term stable operation.
- Dual fire protection system: aerosol extinguishers and automatic sprinklers ensure comprehensive safety.

Battery Container

Battery Container composes of battery racks and fuses.
The number of the racks depends on the total system capacity requirement.



Item	Specification	Note
Battery Container Model	CX-BG3140120005015-BL	
Number of Racks per Container	12	
Dimension (W x D x H) (mm)	6056 x 2438 x 2896	±10mm
Nominal Capacity (kWh)	5015.9	0.5P, 100%DOD, 25±2°C
Voltage Range (V)	1040 ~ 1497.6	25±2°C, 100%DOD, 2.5V~3.6V
Maximum Charging / Discharging Power (kW)	2507.5	0.5P, 25±2°C
Ambient	-30 ~ 60 (Working Temperature)	Charging power ≤0.5P
Working Humidity (%)	5 ~ 95	
IP Class	IP55 (Battery Room) IP55 (Electrical Room)	
Cooling Method	Liquid Cooling	
Fire Suppression System	<ul style="list-style-type: none"> • Aerosol Fire Extinguishers • Sprinkler fire extinguishing system • Smoke, Heat, Li-ion detectors 	
Weight (kg)	43500±500	
Certification	UL 1973 / 9540A IEC 62619 / 60730 / 61030 / 60529 VN 38-3 / 3480	

Battery Cell

The Battery Cell used is Lithium Iron Phosphate (LiFePO₄, or LFP) Prismatic Cell.



Item	Specification	Note
Cell Type	Prismatic	IFP72175207-314Ah
Cell Chemistry	LiFePO ₄	
Dimension (T x W x H) (mm)	71.95 x 174.8 x 207.1	±0.5mm, including cell pole
Weight (g)	5630±200	
Nominal Capacity (Ah)	314	25±2°C, 100%DOD
Nominal Voltage (V)	3.2	
Working Voltage Range (V)	2.5 ~ 3.65	T > 0°C
Nominal Capacity (Wh)	1004.8	25±2°C, 100%DOD
Working Temperature (°C)	15 ~ 45	Charging Power ≤ 0.5P
Storage Temperature (°C)	-30 ~ 60	30% ~ 50% SOC

Battery Pack


The battery pack is mainly composed of battery cells in series, and the battery pack collects the single cell's voltage, temperature data, and controls the cell balancing. The first-level BMS is used to report the collected data.



Item	Specification	Note
Battery Pack Model	CX-BG314BP0A41R104-BL	
Dimension (L x W x H) (mm)	2192 x 785 x 240	±5mm, including cooling pipe connector
Weight (kg)	685±10	
Voltage Range (V)	260 ~ 374.4	25 ± 2 °C, 100%DOD 2.5V~3.65V
Pack Grouping (Parallel and Serial)	1P104S	
Pack Capacity (kWh)	104.4	0.5P, 100%DOD, 25±2 °C
Key Components	104 Cells, 2 BMS, and 1 Fuse	
Maximum Charge/ Discharge Power (kW)	52.2	0.5P, 25±2 °C
Working Temperature (°C)	15 ~ 45	Charging power ≤0.5P
Working Humidity (%)	5 ~ 95	

Battery Rack / Battery Cluster

Battery Rack is mainly composed of multiple Pack and Fuses.

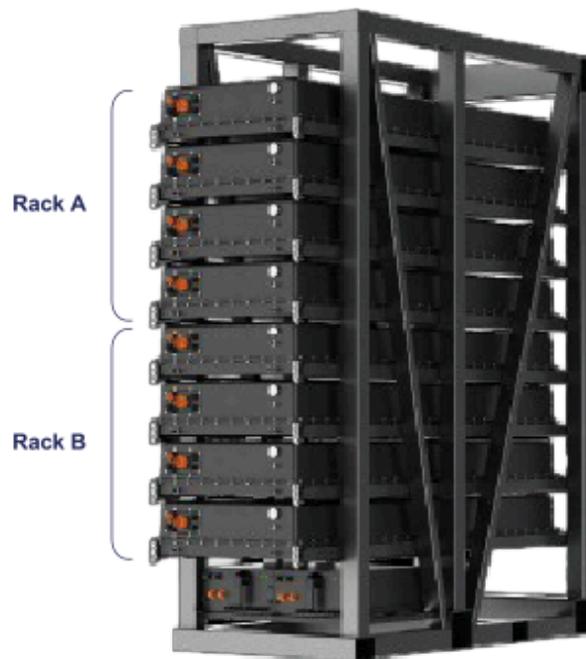

Item	Specification	Note
Battery Rack Appearance		High-voltage Box is at the bottom of the shelf, with 8 battery packs (2 Racks per shelf) on top.
Battery Pack Model	CX-BG314004A41R418-BL	
Number of Packs per Rack	4	
Nominal Capacity (kWh)	417.9	0.5P, 100%DOD, 25±2°C
Voltage Range (V)	1040 ~ 1497.6	25±2°C, 100%DOD
Maximum Charging / Discharging Power (kW)	208.9	0.5P, 25±2°C
Working Temperature (°C)	15 ~ 45	Charging power ≤0.5P
Working Humidity (%)	5 ~ 95	



Contact Us

William Crosby

912-844-1920

wcrosby@ggventurescarolinas.com